

透科自动化

Ethernet/IP JP KV7500



2023-3-22

2023 03 22

2023 03 22


KV STUDIO Ver.10G

KV7500 Ethernet/IP IO KV STUDIO Ver.10G
IO .eds IO


- KV STUDIO Ver.10G
- IO JP_EP20221128.eds

1. KV7500 IO
2. PLC Ethernet IO

LAEConfig IP IP 192.168.0.x

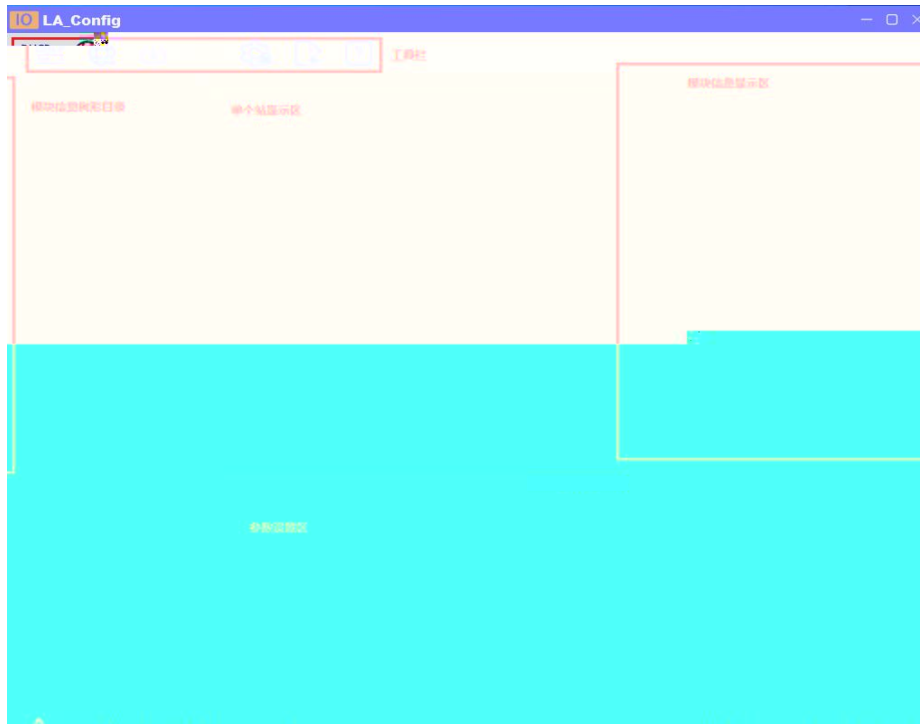

						
DHCP 服务	扫描 模块	下载 参数	监控	参数	描述文 件导入	帮助


✕

IP地址范围: —

0%



IP

IP

" "

IP

IO LA_Config
_ □ ✕




IP地址分属方式: 静态IP

过滤时间: 5

Do_错误模式: 

“IP” “IP”



DHCPService


" MAC" " MAC"

MAC

IP

" "

IP

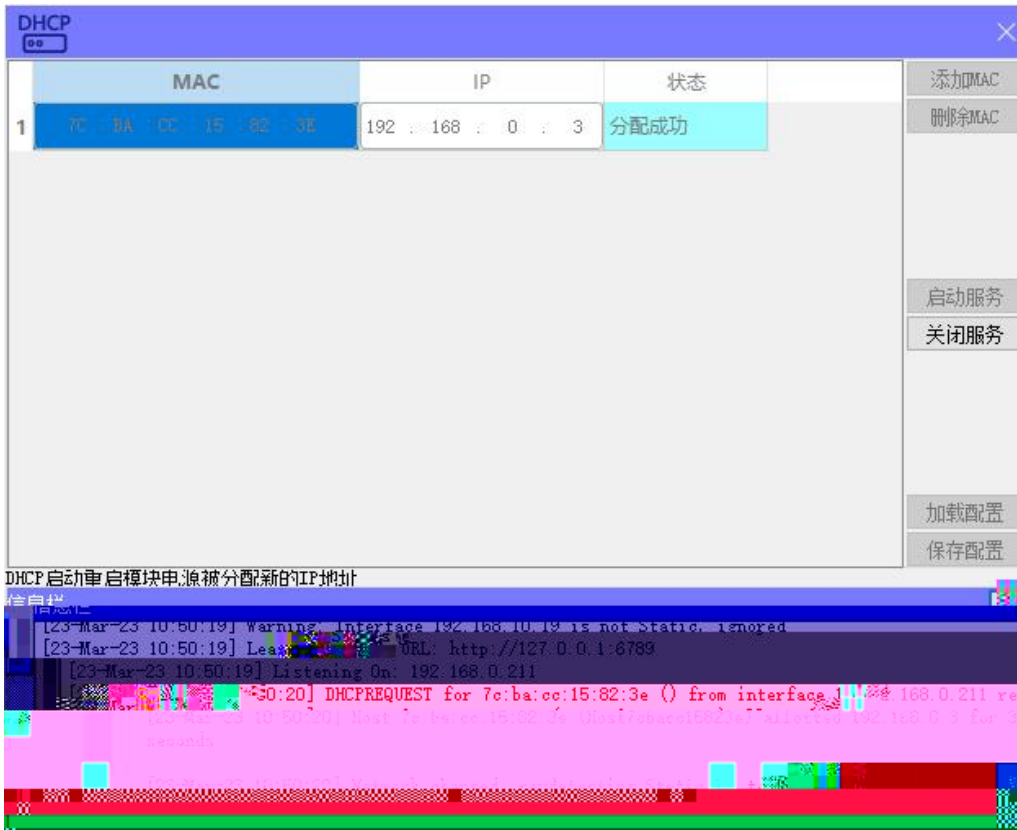

" "



Window with a table header and control buttons.

mac	IP地址	子网掩码	默认网关	模块名称	状态
-----	------	------	------	------	----

扫描时间: 5 :S 全局扫描 修改IP 恢复出厂设置 重启模块

Window showing a table with one data row and a progress bar.

mac	IP地址	子网掩码	默认网关	模块名称	状态
1 7C-BA-CC-15-82-3E	192 . 168 . 0 . 3	255 . 255 . 255 . 0	192 . 168 . 0 . 1	JP0808X_EP	未操作


扫描时间: 5 :S 全局扫描 修改IP 恢复出厂设置 重启模块

扫描进行中: 100%

IP

" IP"

IP

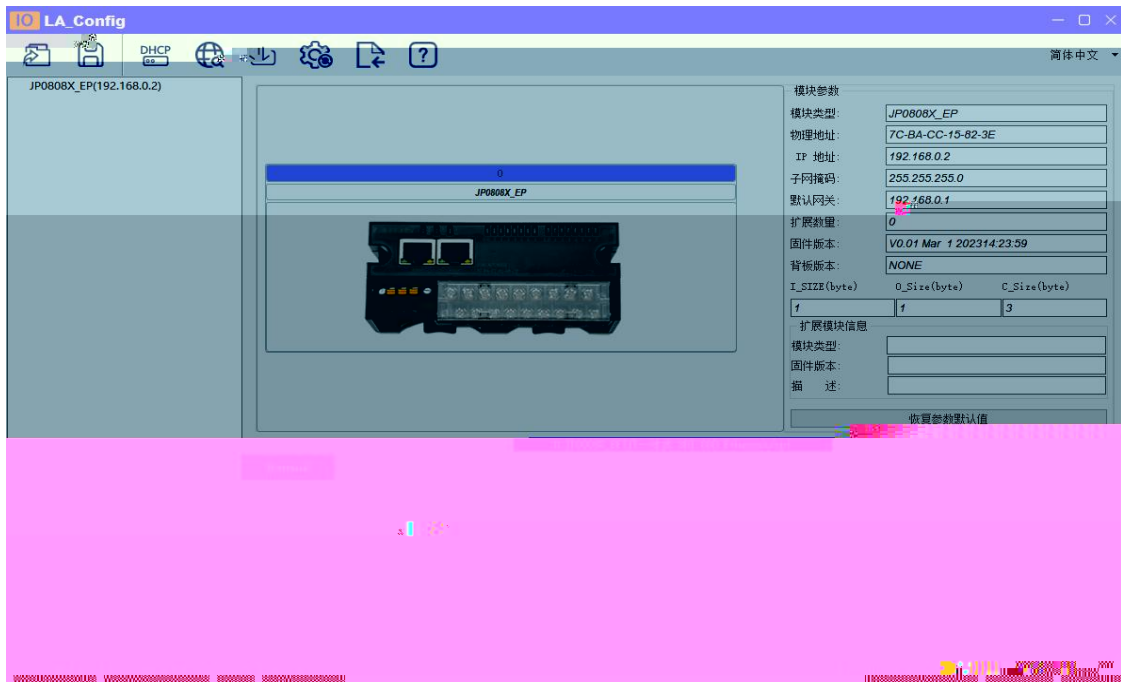

/


1

2) DO_ 0..7 DQ0.x bit
 DQ0.x Bit0 DQ-0.0 "Error Mode"
 bit "1" "Error Value[7..0]" bit DQ0.x

3) DO_ 0..7 "Error Mode[7..0]" bit
 DQ


4)




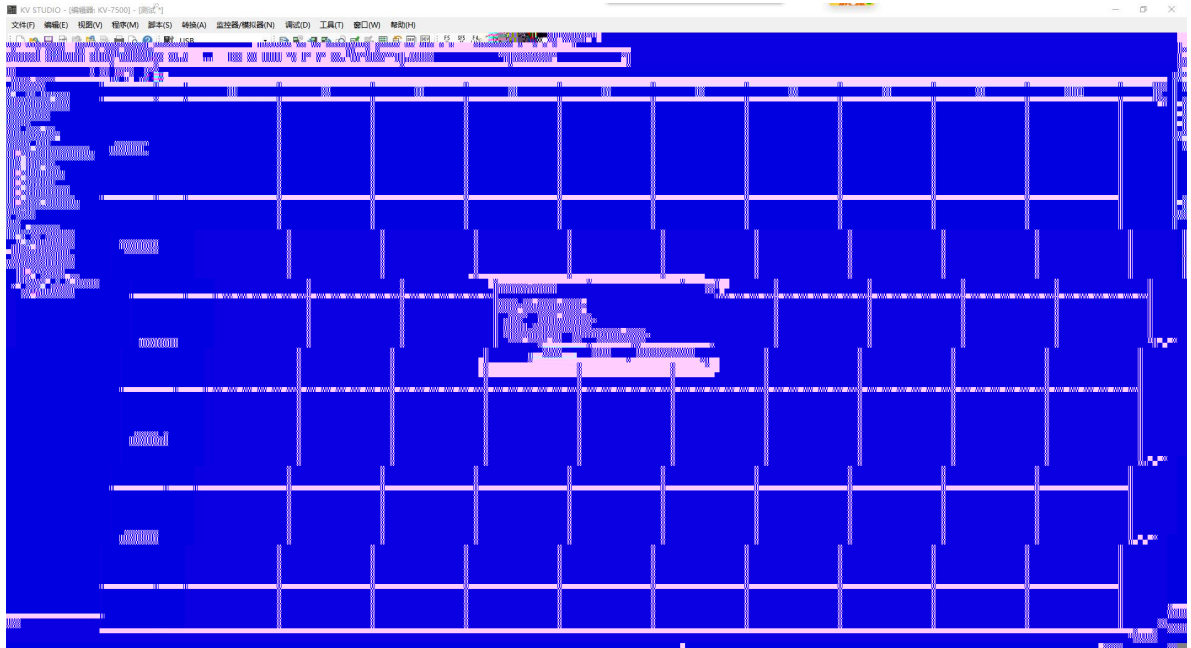


PLC

EtherNet/IP

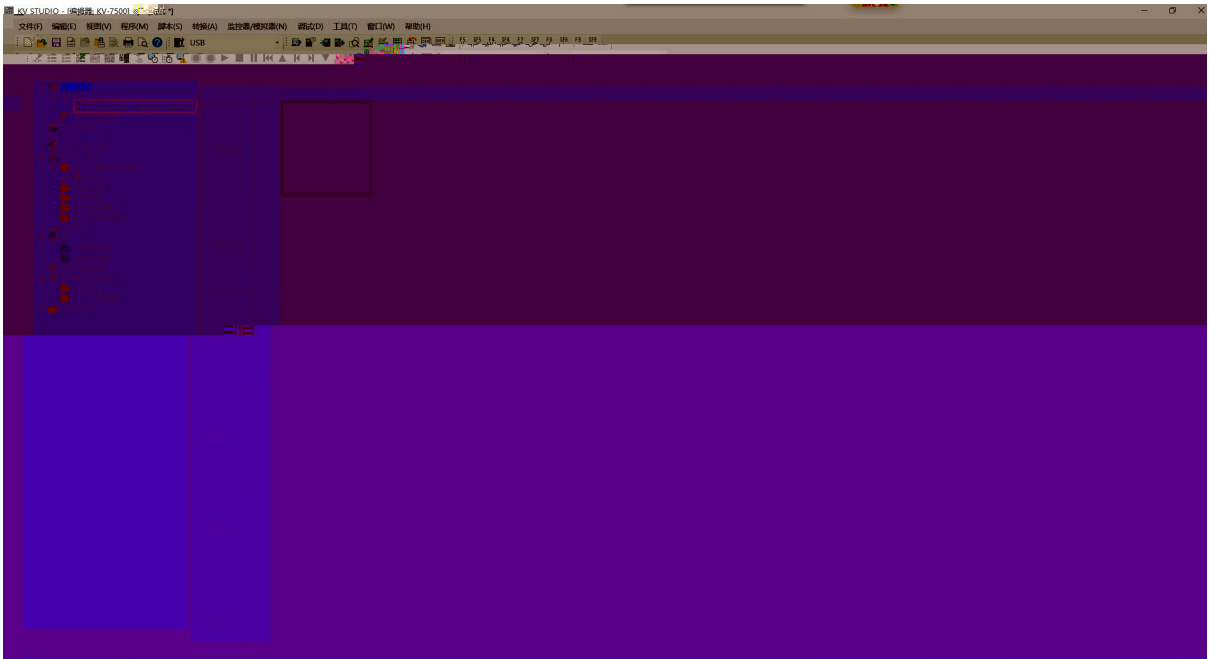

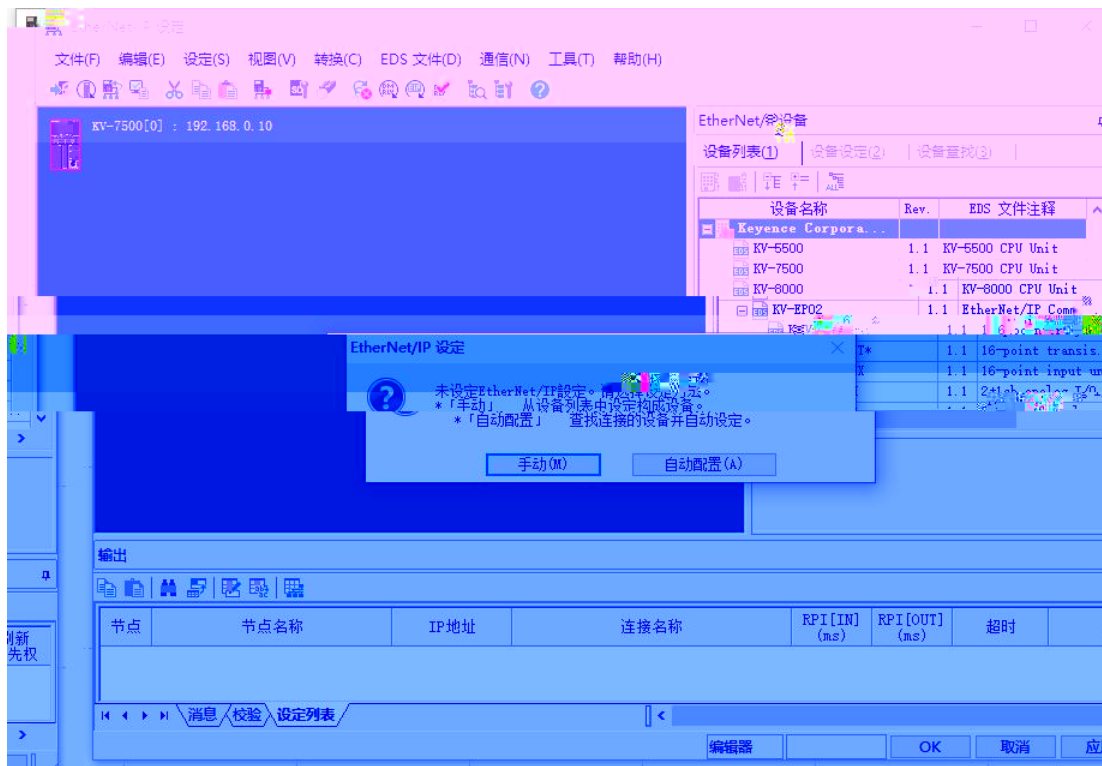


“EtherNet/IP” “EDS” “ ” “ ”

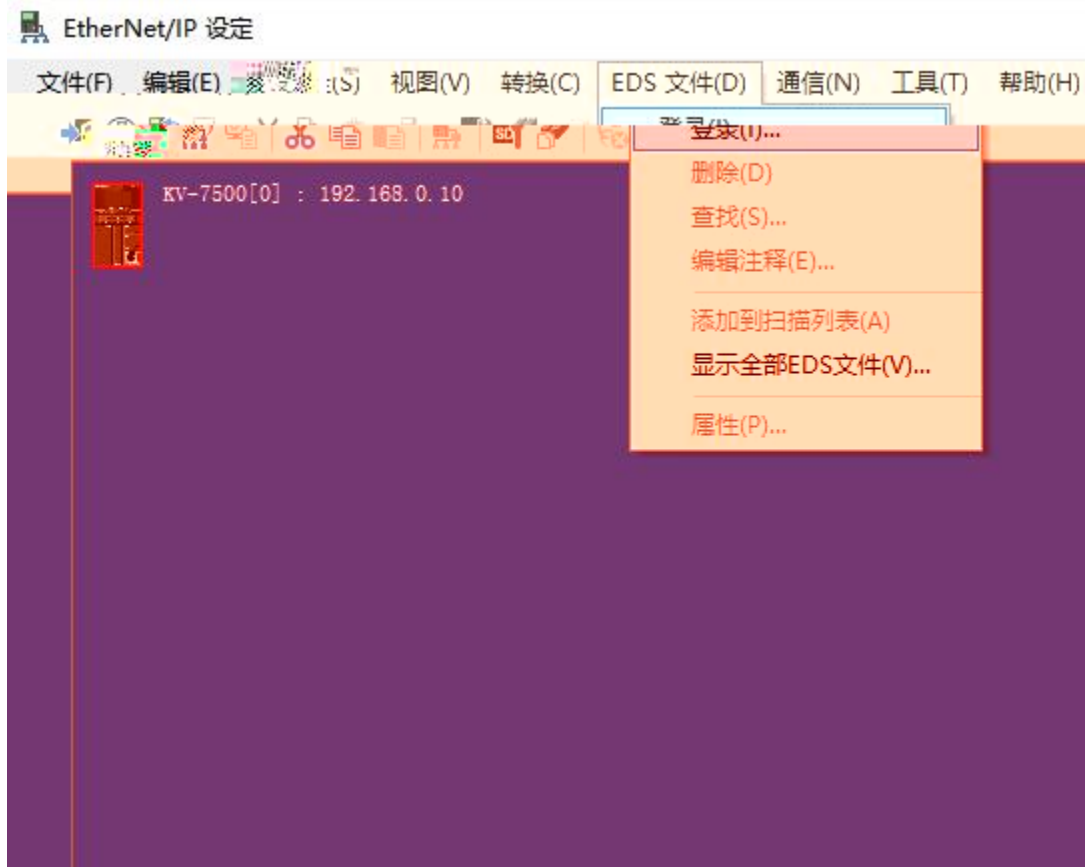


EDS


EDS

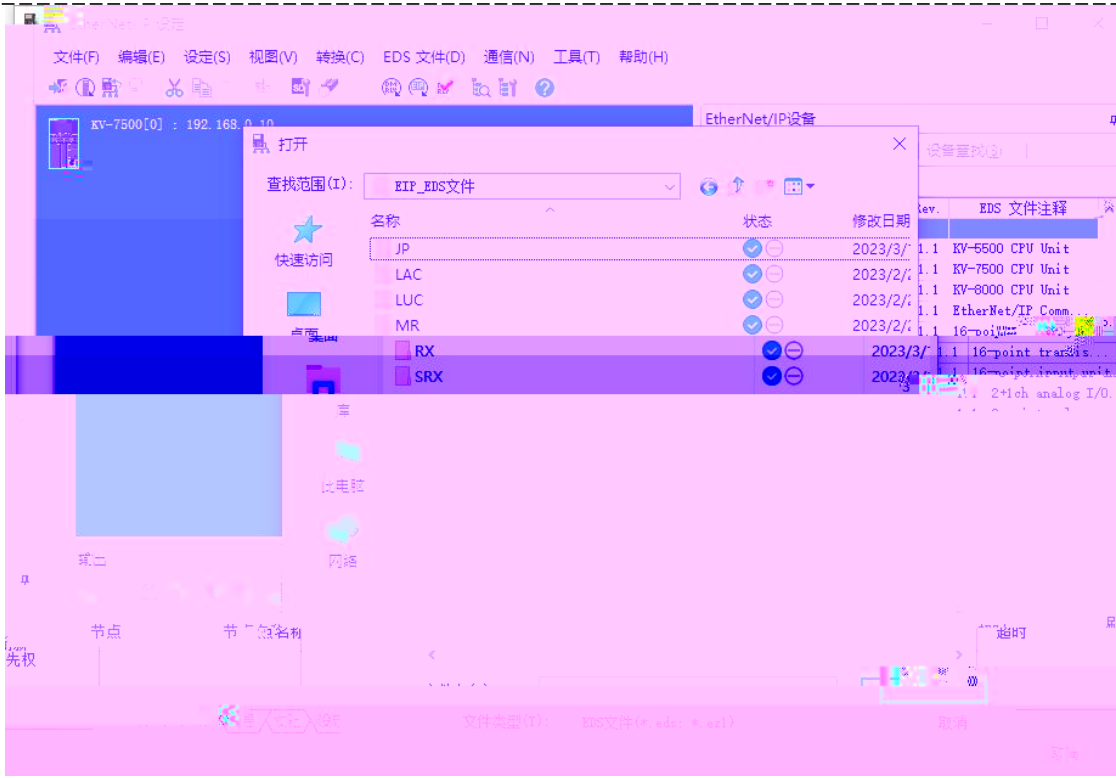


EtherNET/IP “JP-EP”

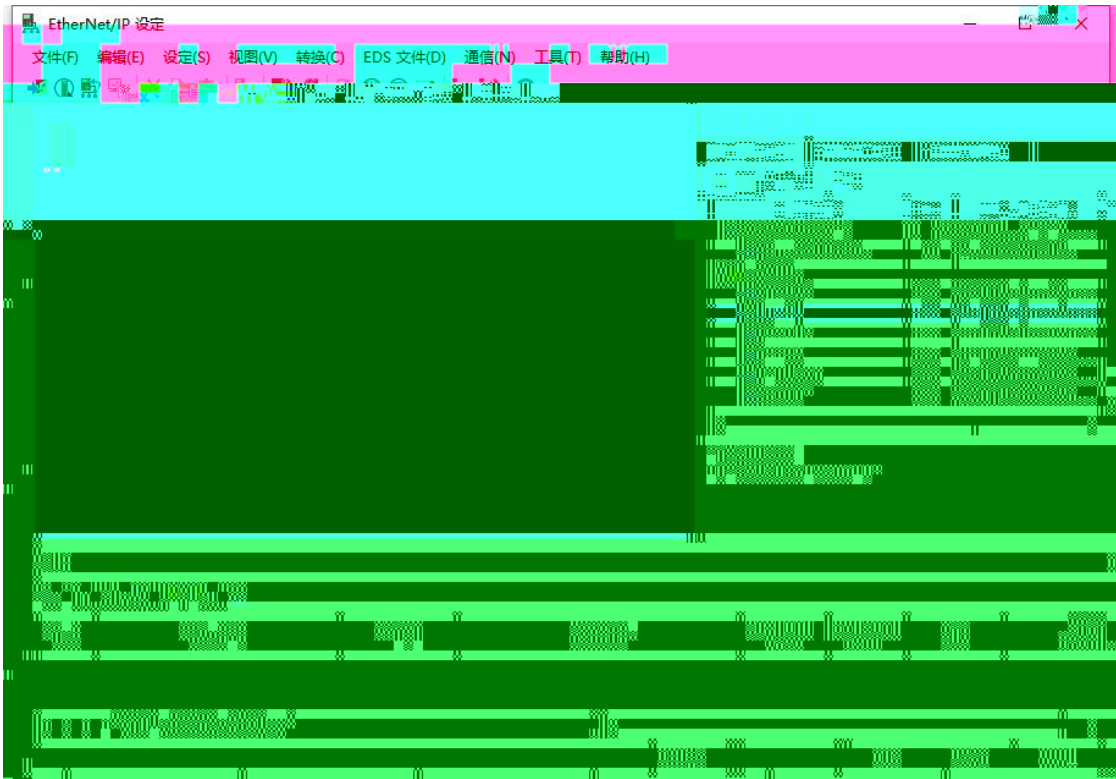


IP

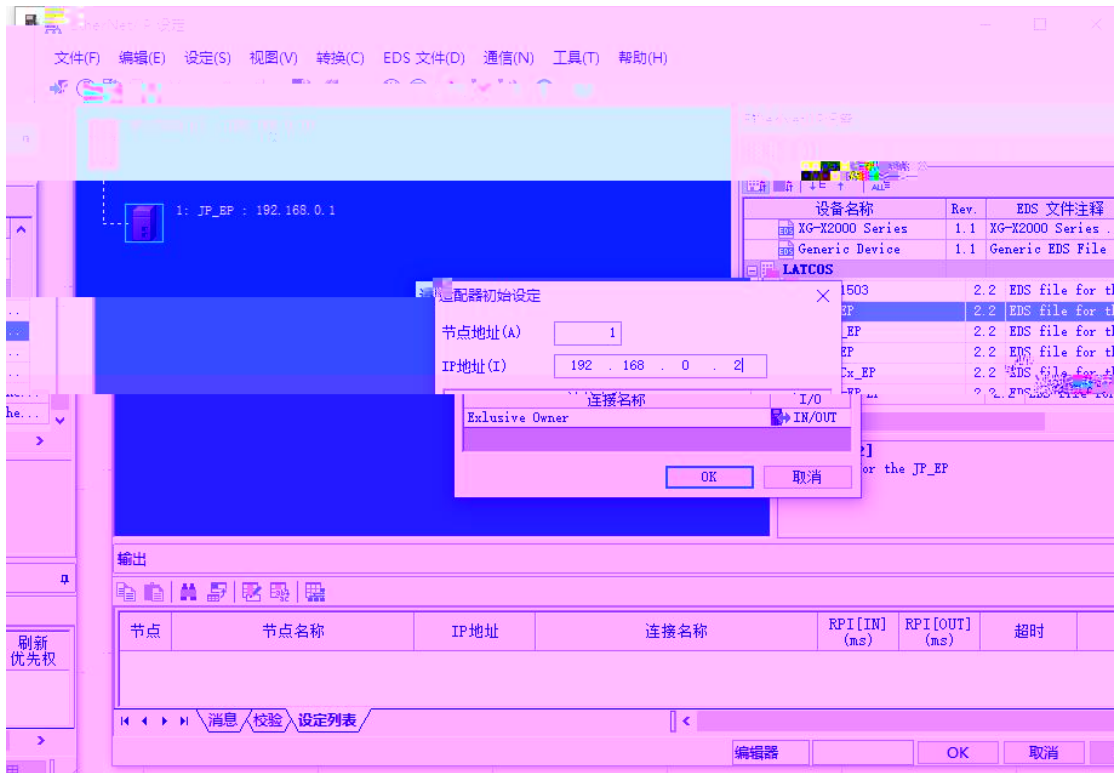

“Exclusive Owner”

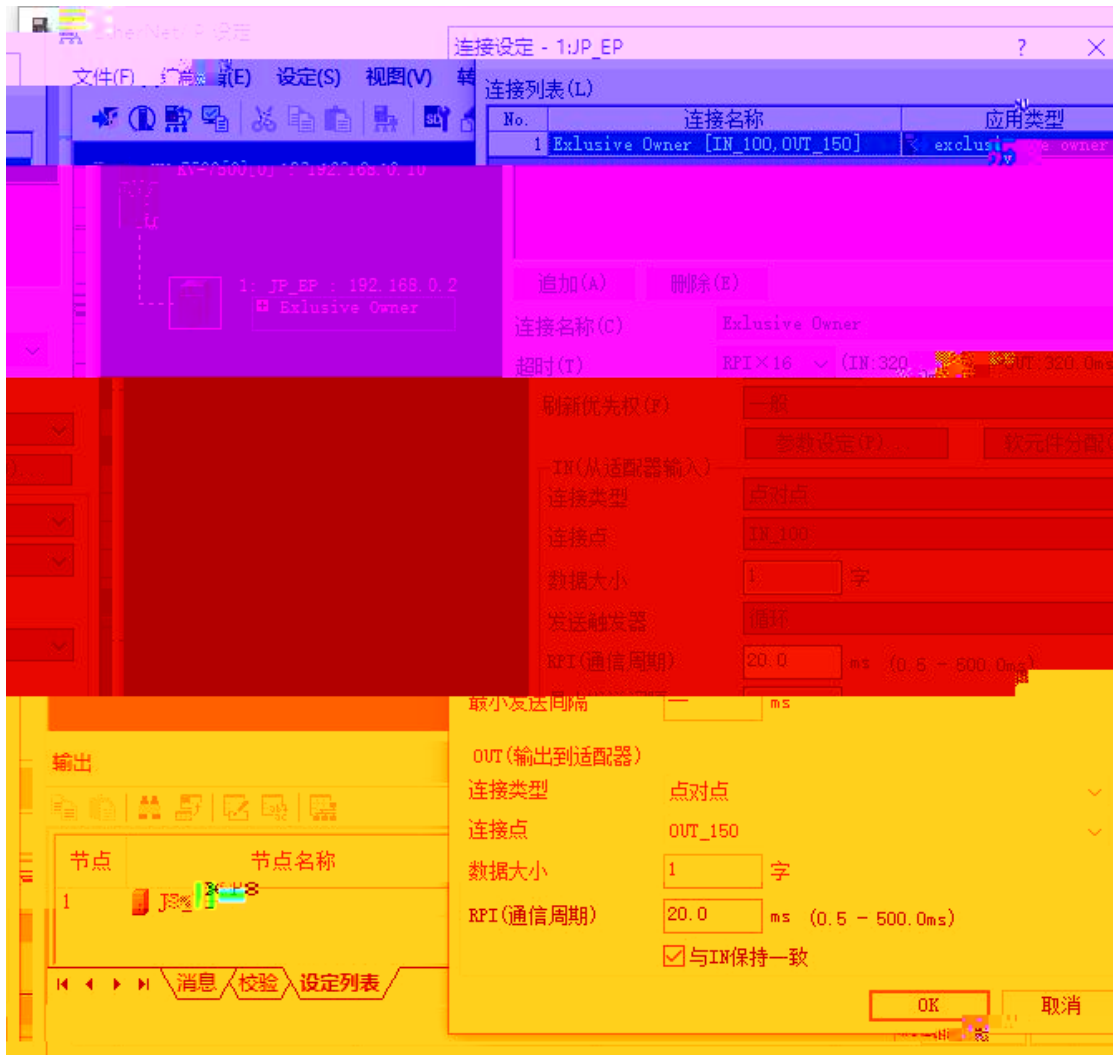

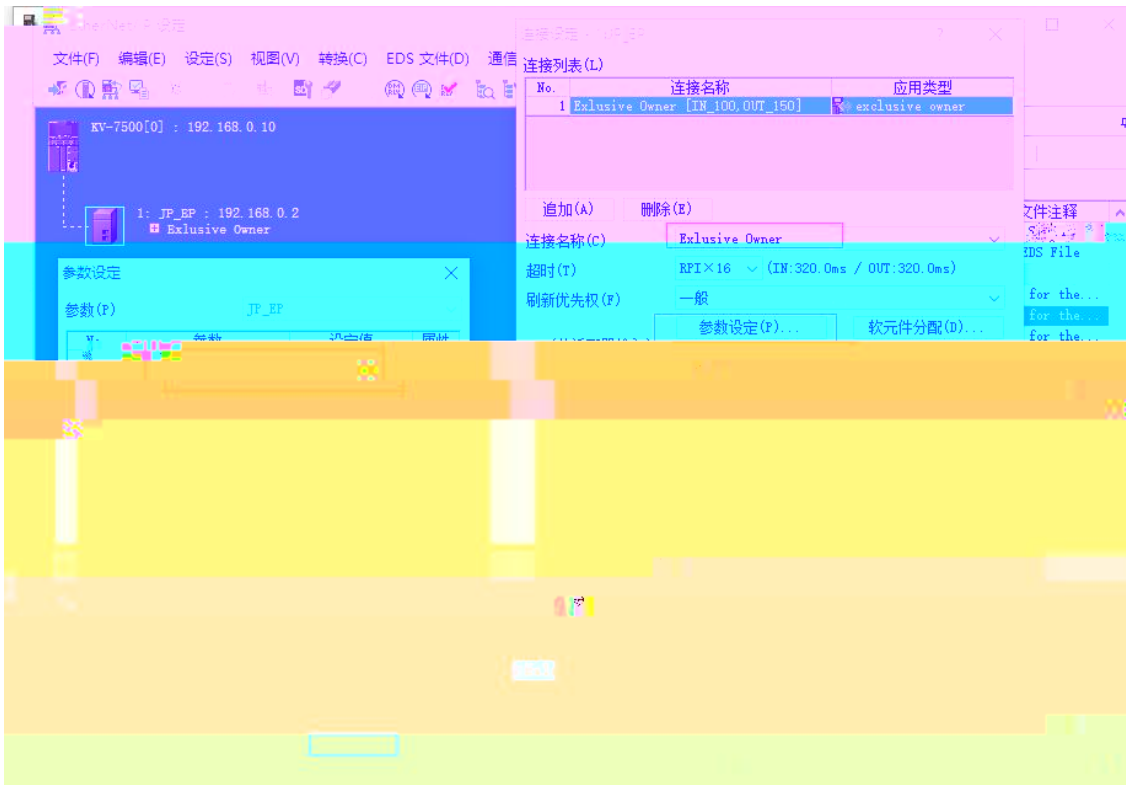


- a Exclusive Owner JP-D0808x-EP JP-D1616x-EP JP-D0016x-EP
 JP-D0032x-EP Input Only JP-D1600-EP JP-D3200-EP
- b
- c RPI 5-30

Input Data Output Data 1 = 8

	JP-D0808X-EP	JP-D1616X-EP	JP-D1600-EP	JP-D3200-EP	JP-D0016X-EP	JP-D0032X-EP
Input Data	1	2	2	4	0	0
Output Data	1	2	-	-	2	4
	Exclusive owner		Input Only		Exclusive owner	

LAECONFIG

I_SIZE(byte)	O_Size(byte)	C_Size(byte)
<input type="text"/>	<input type="text"/>	<input type="text"/>

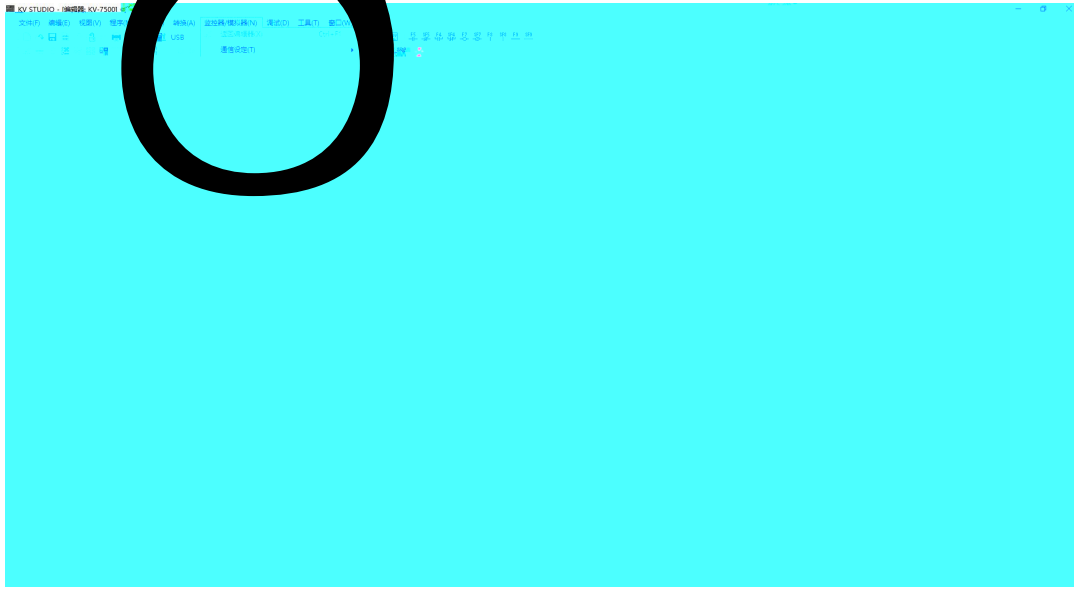


PLC

R



凌科自动化
LATCOS

www.laticos.cn



www.laticos.cn